

SOT-23 Plastic-Encapsulate Transistors



Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

Mechanical Data


- Case: SOT-23
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026

Function Diagram



Supply Voltage
VCC -50V
Collector Current
-0.05 Ampere

SOT-23



Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.0085	3000	15000	150000	7"

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Supply Voltage	V _{CC}	V	-50
Input Voltage	V _{IN}	V	-40~+10
Output Current	I _O	mA	-50
Power Dissipation	P _D	mW	200
Storage temperature	T _{stg}	°C	-55 ~+150
Junction temperature	T _j	°C	-55 ~+150





Small-signal Characteristics

ITEM	SYMBOL	Condition	UNIT	Min	Typ	Max
Transition frequency	f _T	I ₀ = -5mA, V ₀ = -10V	MHz	-	250	-


● Electrical Characteristics (Ta=25°C Unless otherwise noted)

PARAMETER	SYMBOL	UNIT	Condition	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$I_o=-100\mu A, V_{cc}=-5V$	-0.5	-	-
	$V_{I(on)}$		$I_o=-10mA, V_o=-0.3V$	-	-	-3
Output voltage	$V_{O(on)}$		$I_o/I_i=-10mA/-0.5mA$	-	-	-0.3
Input current	I_i	mA	$V_i=-5V$	-		-0.88
Output current	$I_{O(off)}$	μA	$V_{cc}=-50V, V_i=0V$	-	-	-0.5
DC Current Gain	G_i	-	$V_o=-5V, I_o=-5mA$	30	-	-
Input resistance	R_i	k Ω	-	7	10	13
Resistance ratio	R_2/R_1	-	-	0.8	1	1.2

● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

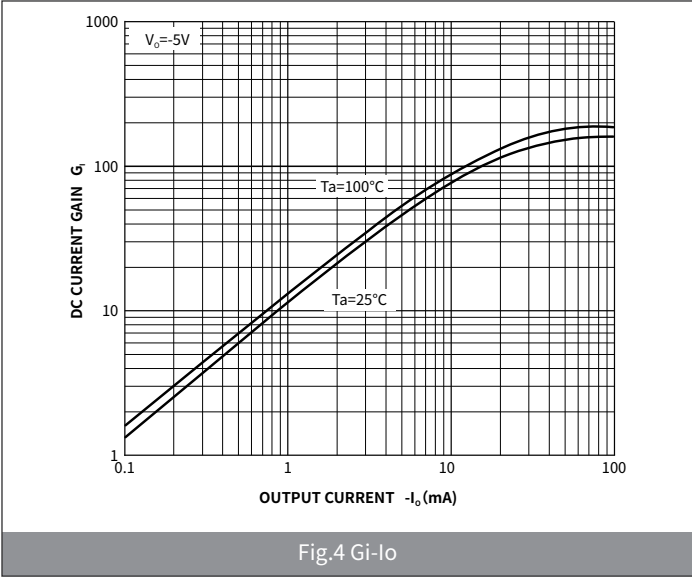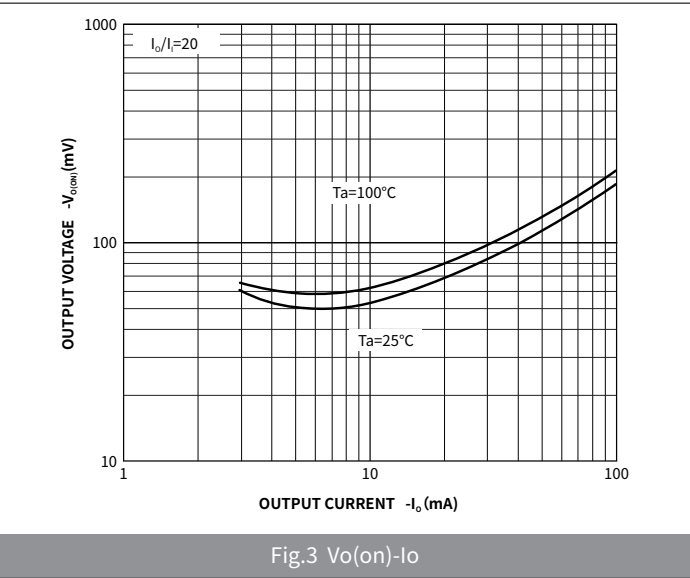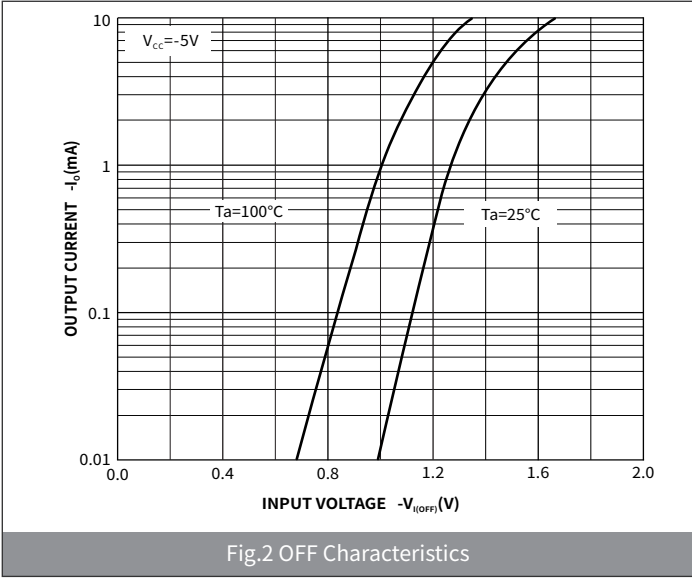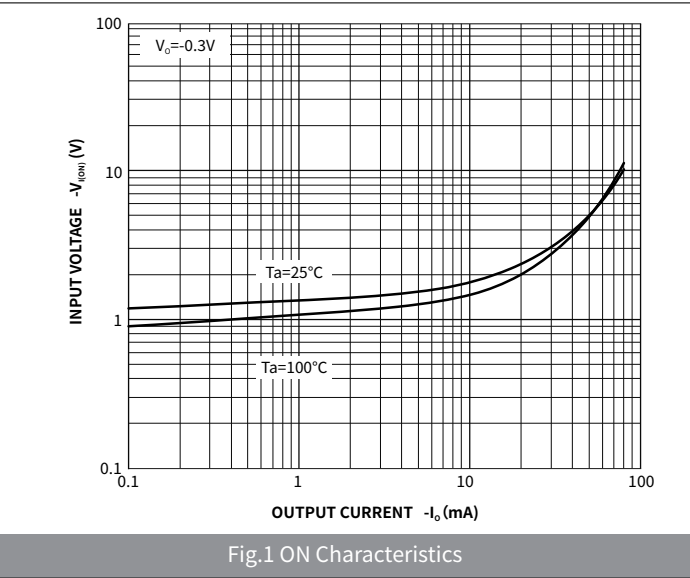

● Package Outline Dimensions (SOT-23)

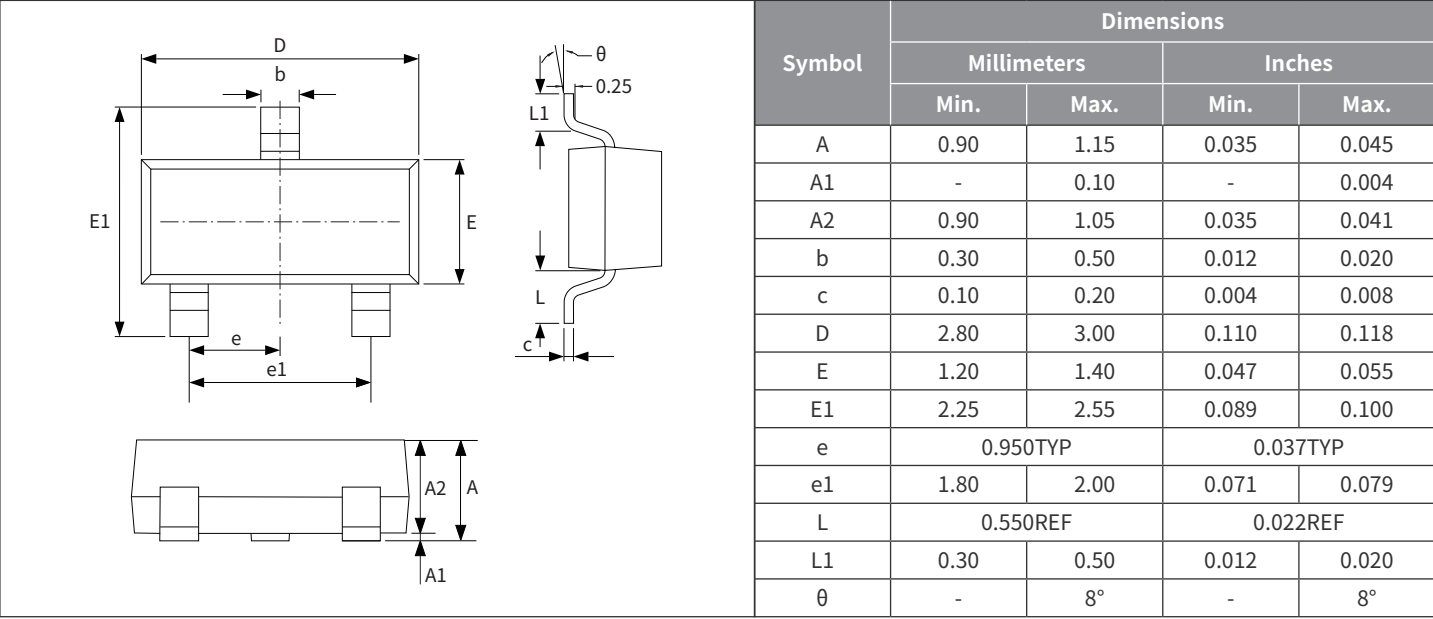

● Suggested Pad Layout

