

MBR10150DCT, MBR10150DFCT

SCHOTTKY BARRIER RECTIFIERS



VOLTAGE: 150 Volts

CURRENT: 10.0 Amperes

Marking and Polarity

FEATURES

- Low forward voltage drop for high efficiency
- Low power loss for high reliability
- High forward surge capability for high reliability
- High frequency operation
- Solder bath temperature 260°C maximum, 10s, per JESD22-B106
- Component in accordance to RoHS 2011/65/EU


MECHANICAL DATA

- Terminals:** Plated Leads Solderable per MIL-STD-202, Method 208
- Mounting Position:** Any
- Lead Free:** Lead Free Finish, RoHS Compliant
- Polarity:** As marked


TYPICAL APPLICATIONS

- For use in high frequency inverters ,
AC/DC converters, LED driver etc. applications

TO-220C MBR10150DCT

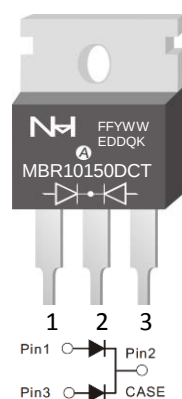

TO-220F MBR10150DFCT

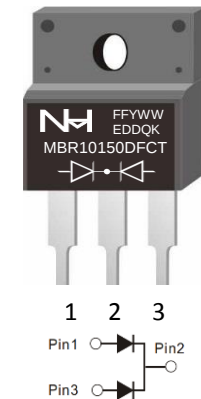

Remark:

- NH=niuhang trademark;
- FF=Product line code, According to actual changes
YWW=Data code, According to actual changes
EDDQK=Internal code, According to actual changes
- MBR10150DCT/DFCT=Module.

Maximum Ratings (Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	MBR10150DCT, MBR10150DFCT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	150	V
Maximum average forward rectified current (see fig.1)	$I_{F(AV)}$	10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	150	A
Peak repetitive reverse current per diode at $t_p=2\mu s$ 1KHz	I_{RRM}	5	uA
Isolation voltage (TO-220F only) from terminals to heatsink $t=1$ min	V_{AC}	1500	V
Maximum Mounting torque, M3 screw	T_{MM}	1.1	N.m

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Test Conditions		Symbol	MBR10150DCT,MBR10150DFCT			Unit
				Min.	Typ.	Max.	
Instaneous forward voltage per diode (note1)	T _A =25℃	IF= 5 A	V _F	--	0.83	0.90	V
	T _A =125℃			--	0.80	0.88	
Reverse current per diode (note1)	T _A =25℃	VR= 150 V	I _R	--	--	5	uA
	T _A =125℃			--	--	5	mA
Typical junction capacitance	4V,1MHz		C _J	--	400	--	pF

Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	MBR10150DCT, MBR10150DFCT	Unit
Operating junction	T_J	-55 to 175	°C
Storage temperature range	T_{STD}	-55 to 175	
Typical thermal resistance (note3)	$R_{\theta JC}$	TO-220AB	°C/W
		2.5	
		TO-220F	4.5

- Notes:
- Pulse test: 300 μs pulse width, 1% duty cycle
 - Device mounted on 75mm x 45mm x 2.5mm Aluminum Plate Heatsink.

MBR10150DCT, MBR10150DFCT

SCHOTTKY BARRIER RECTIFIERS



RATING AND CHARACTERISTIC CURVES

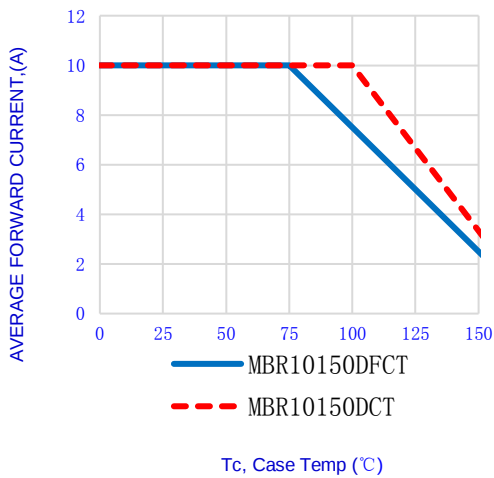


Fig.1-FORWARD CURRENT DERATING CURVE

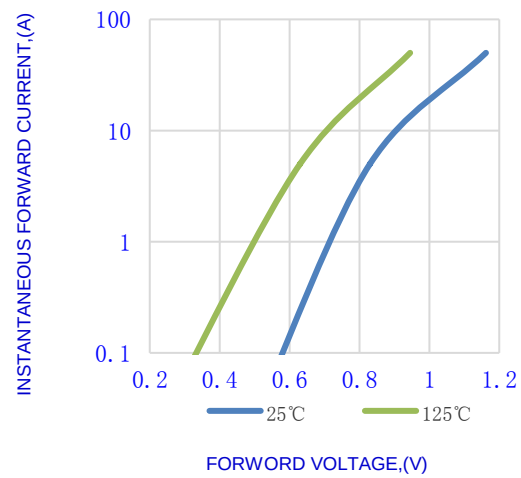


Fig.2- TYPICAL INSTANTANEOUS FORWARD

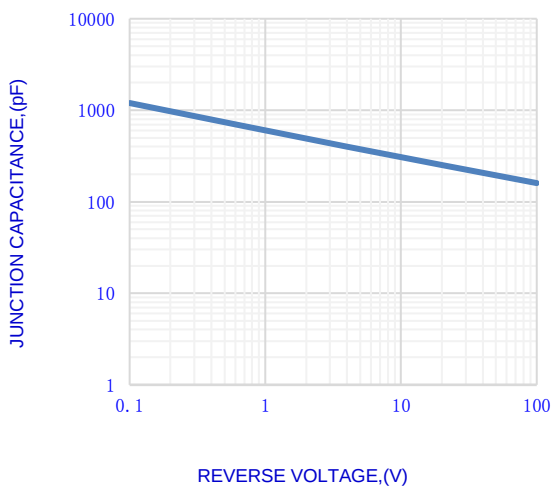


Fig.3- TYPICAL JUNCTION CAPACITANCE

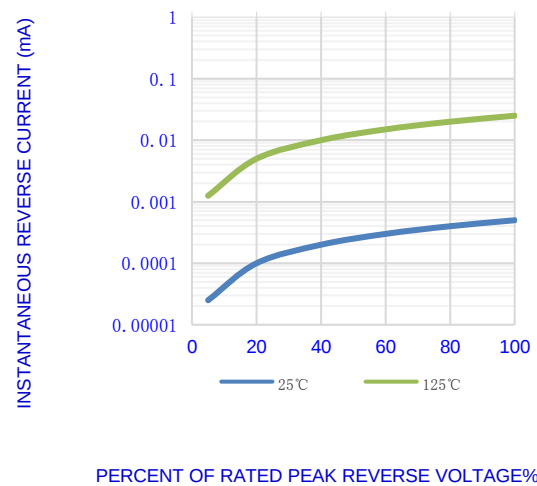


Fig.4- TYPICAL REVERSE CHARACTERISTICS

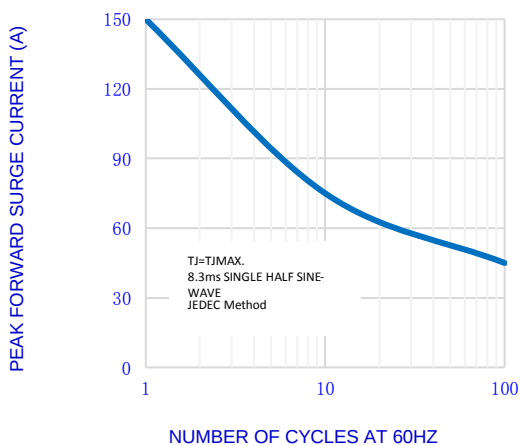


Fig.5-MAX. NON-REPETITIVE SURGE CURRENT


MBR10150DCT, MBR10150DFCT

SCHOTTKY BARRIER RECTIFIERS



OUTLINE DRAWINGS

TO-220C

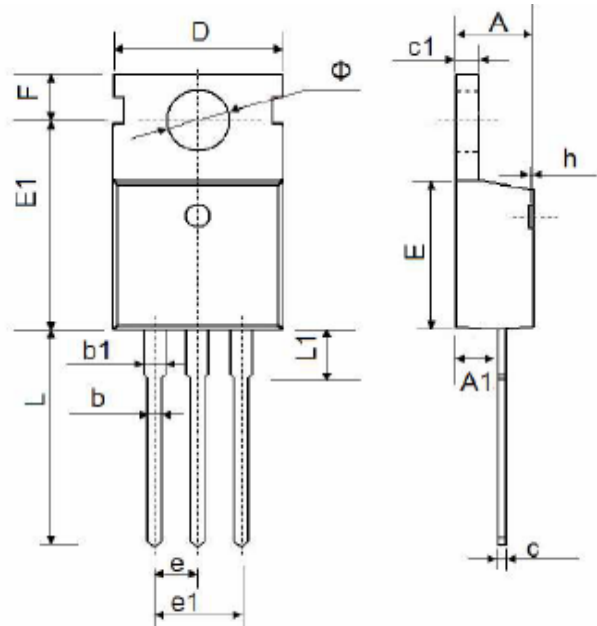


OUTLINE DIMENSIONS(Units:mm)

Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40	-	4.60	0.17	-	0.18
A1	2.00	-	2.50	0.08	-	0.10
b	0.70	-	0.90	0.03	-	0.04
b1	1.10	-	1.40	0.04	-	0.06
c	0.40	-	0.70	0.02	-	0.03
c1	1.20	-	1.40	0.05	-	0.06
D	9.80	-	10.40	0.39	-	0.41
E	8.90	-	9.80	0.35	-	0.39
E1	12.50	-	12.95	0.49	-	0.51
e	-	2.54	-	-	0.10	-
e1	4.90	-	5.20	0.19	-	0.20
F	2.65	-	3.00	0.10	-	0.12
h	0.00	-	0.30	0.00	-	0.01
L	12.90	-	13.40	0.51	-	0.53
L1	2.80	-	3.40	0.11	-	0.13
φ	3.40	-	3.80	0.13	-	0.15

OUTLINE DRAWINGS

TO-220F

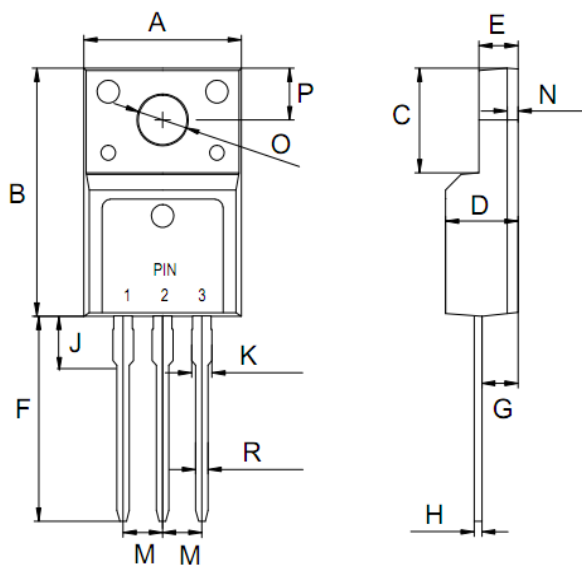

OUTLINE DIMENSIONS(MILI METERS)

Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.91	10.21	10.41	0.3902	0.4020	0.4098
B	15.30	16.00	16.50	0.6024	0.6299	0.6496
C	6.20	6.75	7.20	0.2441	0.2657	0.2835
D	4.44	4.70	4.80	0.1748	0.1850	0.1890
E	2.45	2.57	3.55	0.0965	0.1012	0.1398
F	12.50	13.50	14.50	0.4921	0.5315	0.5709
G	2.25	2.40	2.60	0.0886	0.0945	0.1024
H	0.35	0.50	0.58	0.0138	0.0197	0.0228
J	2.60	2.88	4.00	0.1024	0.1134	0.1575
M	2.41	2.50	2.67	0.0949	0.0984	0.1051
N	4.88	5.00	5.28	0.1921	0.1969	0.2079
R	0.58	0.82	0.94	0.0228	0.0323	0.0370
O	3.25	3.55	3.75	0.1280	0.1398	0.1476
P	2.15	3.30	3.50	0.0846	0.1299	0.1378

PACKING INFORMATION

TO-220C/TO-220F

Package Method	Tube Size (mm)	Quantity (pcs/Tube)	Inner Box Size L×W×H(mm)	Quantity (pcs/Inner Box)	Outer Carton Size L×W×H(mm)	Quantity (pcs/carton)
Tube Package	530x35x8	50	560x155x55	1000	570x284x185	5000


MBR10150DCT, MBR10150DFCT
SCHOTTKY BARRIER RECTIFIERS



Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

Recommended temperature profile for IR reflow

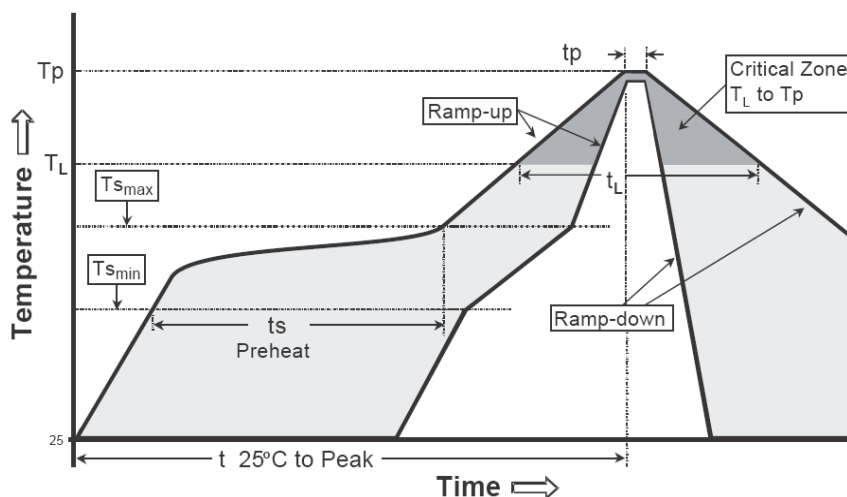

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat -Temperature Min(TS min) -Temperature Max(TS max) -Time(ts min to ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-180 seconds
Time maintained above: -Temperature (TL) - Time (tL)	183°C 60-150 seconds	217°C 60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

MBR10150DCT, MBR10150DFCT
SCHOTTKY BARRIER RECTIFIERS



Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from niuhang Electronics co., LTD
- Niuhan Electronics co., LTD. reserves the rights to make changes of the content herein the document anytime without notification.
- Niuhan Electronics co., LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Niuhan Electronics co., LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Niuhan Electronics co., LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Niuhan Electronics co., LTD. for any damages resulting from such improper use or sale.
- When the appearance of the product and chip size does not change, in order to product the customer. quality, change the internal structure and the production process Niuhan can not notify