


<p style="text-align: center;">SOD-123FL</p> <p style="text-align: center;">Dimensions in millimeters</p>	<p style="text-align: center;">FEATURES</p> <ul style="list-style-type: none"> ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 ◆ Metal silicon junction, majority carrier conduction ◆ Low power loss, high efficiency ◆ High forward surge current capability ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension 																																																																																																																																																																								
<p style="text-align: center;">MECHANICAL DATA</p> <p>Case: JEDEC SOD-123FL molded plastic body Terminals: Solderable per MIL-STD-750, Method 2026 Polarity: Color band denotes cathode end Mounting Position: Any Weight: 0.0007 ounce, 0.02 grams</p>																																																																																																																																																																									
<p style="text-align: center;">MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p>																																																																																																																																																																									
<p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.</p>																																																																																																																																																																									
<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>SYMBOLS</th> <th>K12</th> <th>K13</th> <th>K14</th> <th>K15</th> <th>K16</th> <th>K17</th> <th>K18</th> <th>K19</th> <th>K110</th> <th>K115</th> <th>K120</th> <th>UNITS</th> </tr> </thead> </table>	Catalog Number	SYMBOLS	K12	K13	K14	K15	K16	K17	K18	K19	K110	K115	K120	UNITS	<table border="1"> <tbody> <tr> <td>Maximum repetitive peak reverse voltage</td> <td>V_{RRM}</td> <td>20</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>70</td> <td>80</td> <td>90</td> <td>100</td> <td>150</td> <td>200</td> <td>VOLTS</td> </tr> <tr> <td>Maximum RMS voltage</td> <td>V_{RMS}</td> <td>14</td> <td>21</td> <td>28</td> <td>35</td> <td>42</td> <td>49</td> <td>56</td> <td>63</td> <td>70</td> <td>105</td> <td>140</td> <td>VOLTS</td> </tr> <tr> <td>Maximum DC blocking voltage</td> <td>V_{DC}</td> <td>20</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>70</td> <td>80</td> <td>90</td> <td>100</td> <td>150</td> <td>200</td> <td>VOLTS</td> </tr> <tr> <td>Maximum average forward rectified current</td> <td>$I_{(AV)}$</td> <td colspan="11">1.0</td> <td>Amp</td> </tr> <tr> <td>Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)</td> <td>I_{FSM}</td> <td colspan="11">25.0</td> <td>Amps</td> </tr> <tr> <td>Maximum instantaneous forward voltage at 1.0A</td> <td>V_F</td> <td colspan="3">0.55</td> <td colspan="3">0.70</td> <td colspan="3">0.85</td> <td colspan="2">0.95</td> <td>Volts</td> </tr> <tr> <td rowspan="2">Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$</td> <td rowspan="2">I_R</td> <td colspan="9">0.5</td> <td colspan="2">0.2</td> <td rowspan="2">mA</td> </tr> <tr> <td colspan="6">10.0</td> <td colspan="3">5.0</td> <td colspan="2">2.0</td> </tr> <tr> <td>Typical junction capacitance (NOTE 1)</td> <td>C_J</td> <td colspan="6">110</td> <td colspan="6">80</td> <td>pF</td> </tr> <tr> <td>Operating junction temperature range</td> <td>T_J</td> <td colspan="6">-65 to +125</td> <td colspan="6">-65 to +150</td> <td>°C</td> </tr> <tr> <td>Storage temperature range</td> <td>T_{STG}</td> <td colspan="12">-65 to +150</td> <td>°C</td> </tr> </tbody> </table>	Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS	Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	105	140	VOLTS	Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	150	200	VOLTS	Maximum average forward rectified current	$I_{(AV)}$	1.0											Amp	Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0											Amps	Maximum instantaneous forward voltage at 1.0A	V_F	0.55			0.70			0.85			0.95		Volts	Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	0.5									0.2		mA	10.0						5.0			2.0		Typical junction capacitance (NOTE 1)	C_J	110						80						pF	Operating junction temperature range	T_J	-65 to +125						-65 to +150						°C	Storage temperature range	T_{STG}	-65 to +150												°C
Catalog Number	SYMBOLS	K12	K13	K14	K15	K16	K17	K18	K19	K110	K115	K120	UNITS																																																																																																																																																												
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS																																																																																																																																																												
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	105	140	VOLTS																																																																																																																																																												
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	150	200	VOLTS																																																																																																																																																												
Maximum average forward rectified current	$I_{(AV)}$	1.0											Amp																																																																																																																																																												
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0											Amps																																																																																																																																																												
Maximum instantaneous forward voltage at 1.0A	V_F	0.55			0.70			0.85			0.95		Volts																																																																																																																																																												
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	0.5									0.2		mA																																																																																																																																																												
		10.0						5.0			2.0																																																																																																																																																														
Typical junction capacitance (NOTE 1)	C_J	110						80						pF																																																																																																																																																											
Operating junction temperature range	T_J	-65 to +125						-65 to +150						°C																																																																																																																																																											
Storage temperature range	T_{STG}	-65 to +150												°C																																																																																																																																																											
<p>Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.</p>																																																																																																																																																																									


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

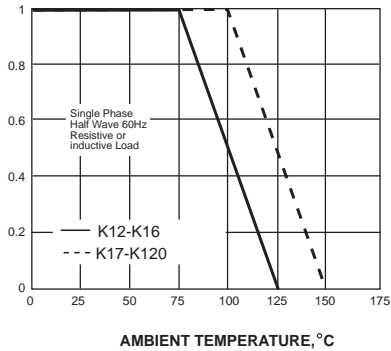


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

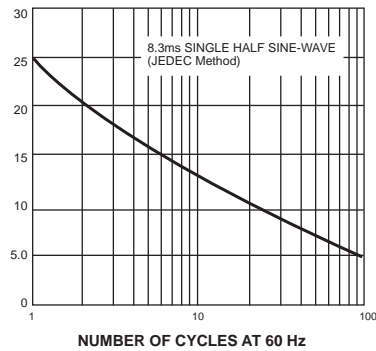


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

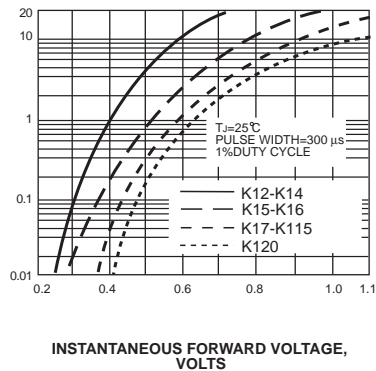

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

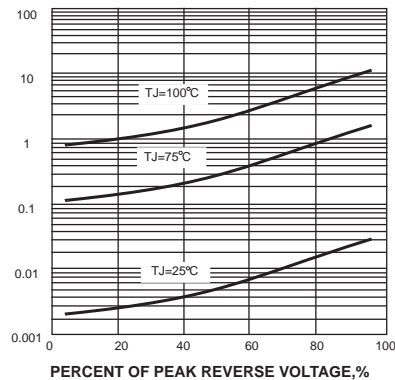

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

