

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-20V	400mΩ@-4.5V	-0.7A
	550mΩ@-2.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- High power and current handling capability
- Surface mount package
- ESD protected 2KV

Application


- Battery Switch
- DC/DC Converter

Package




SOT-523

Circuit diagram



Marking



04K :Device Code

Order Information

Device	Package	Unit/Tape
SP2004KT5	SOT-523	3000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	-0.7	A
Pulse Drain Current Tested	I_{DM}	-2.8	A
Power Dissipation	P_D	150	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	833	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=-250μA	-20	-	-	V
Drain-Source Leakage Current	IDSS	VDS=-16V , VGS=0V	-	-	-1	uA
Gate-Source Leakage Current	IGSS	VGS=±12V , VDS=0V	-	-	±10	uA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=-250μA	-0.35	-0.65	-1.00	V
Static Drain-Source On-Resistance	RDS(on)	VGS=-4.5V , ID=-500mA	-	400	550	mΩ
		VGS=-2.5V , ID=-200mA	-	550	700	
Dynamic characteristics						
Input Capacitance	Ciss	VDS=-16V , VGS=0V , f=1MHz	-	113	-	pF
Output Capacitance	Coss		-	15	-	
Reverse Transfer Capacitance	Crss		-	9	-	
Total Gate Charge	Qg	VDS=-10V , VGS=-4.5V , ID=-2A	-	1.9	-	nC
Gate-Source Charge	Qgs		-	0.4	-	
Gate-Drain Charge	Qgd		-	0.31	-	
Switching Characteristics						
Turn-On Delay Time	td(on)	VDD=-10V VGS=-4.5V , RG=10Ω , ID=-200mA	-	9	-	nS
Turn-On Rise Time	tr		-	5.7	-	
Turn-Off Delay Time	td(off)		-	32.6	-	
Turn-Off Fall Time	tf		-	20.3	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	VSD	VGS=0V , IS=-1A , TJ=25℃	-	-	-1.2	V


Typical Characteristics

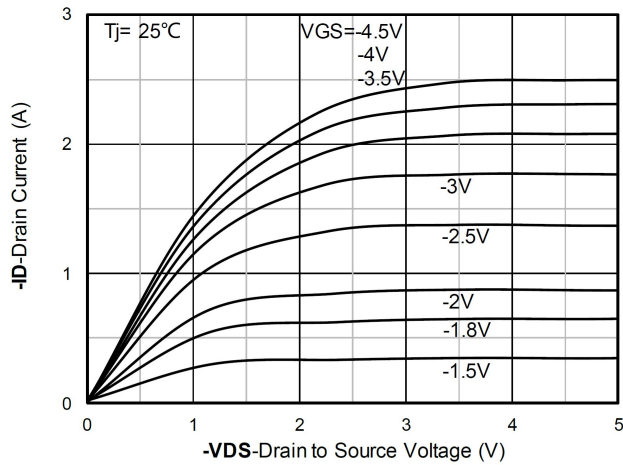


Output Characteristics

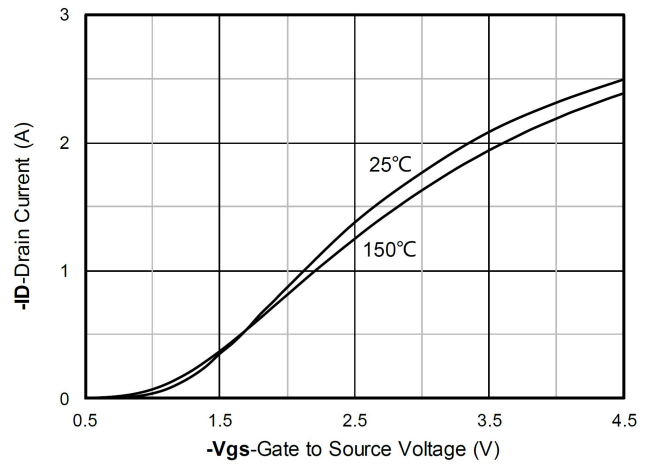


Transfer Characteristics

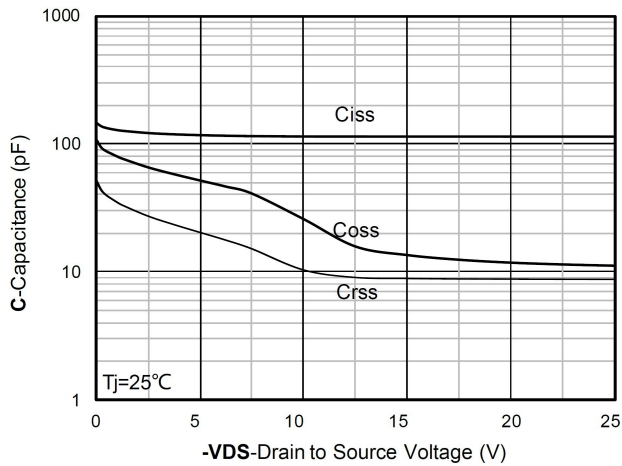


Capacitance Characteristics

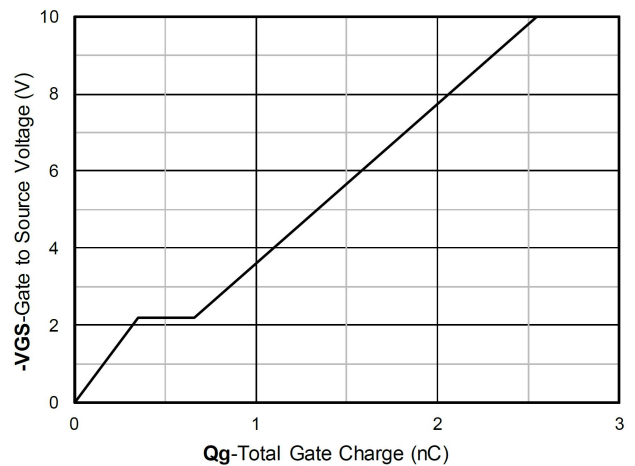


Gate Charge

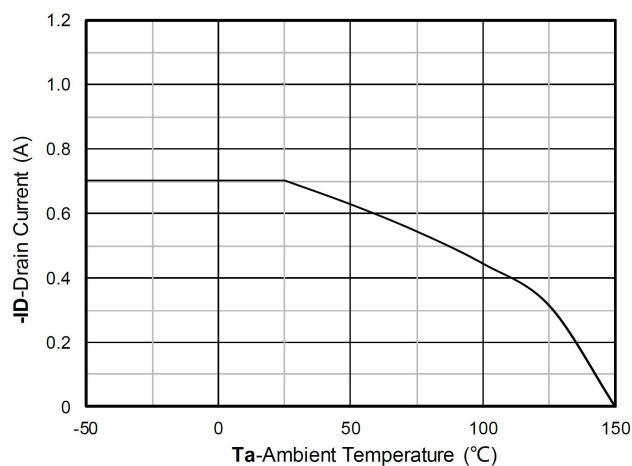


Current dissipation

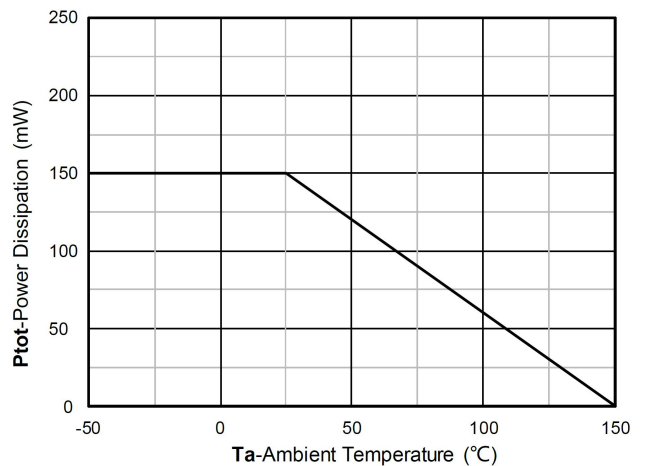


Power dissipation

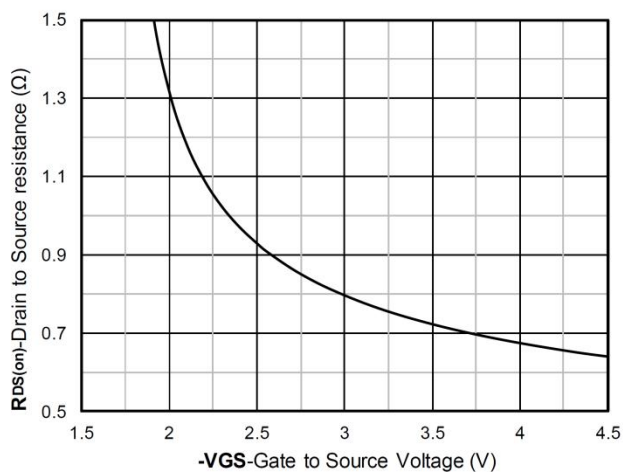


On-Resistance vs Gate to Source Voltage

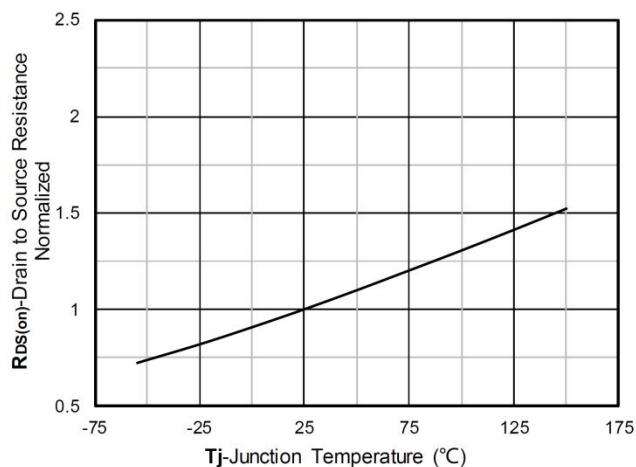


Normalized On-Resistance

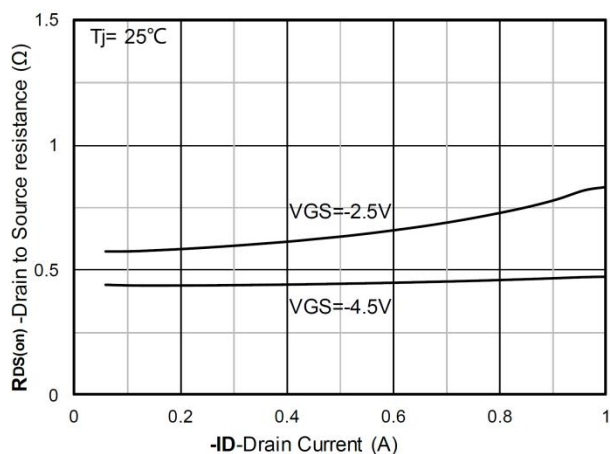


RDS(on) VS Drain Current

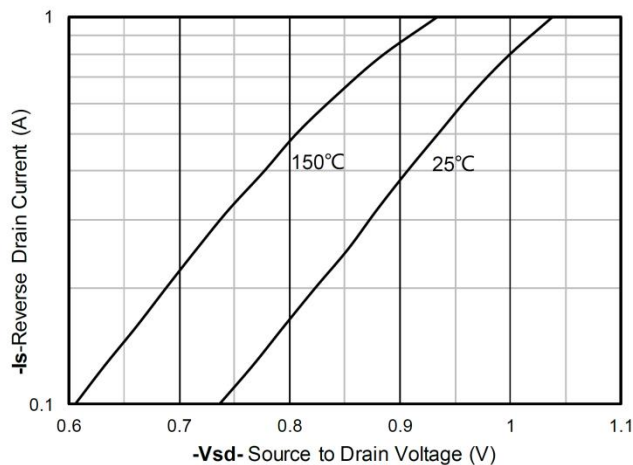

Forward characteristics of reverse diode

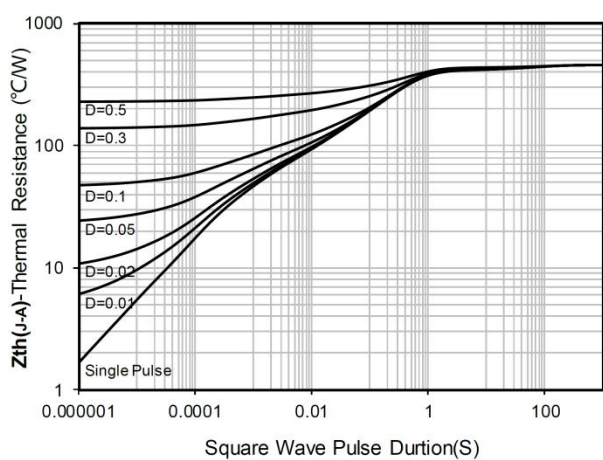


Maximum Transient Thermal Impedance

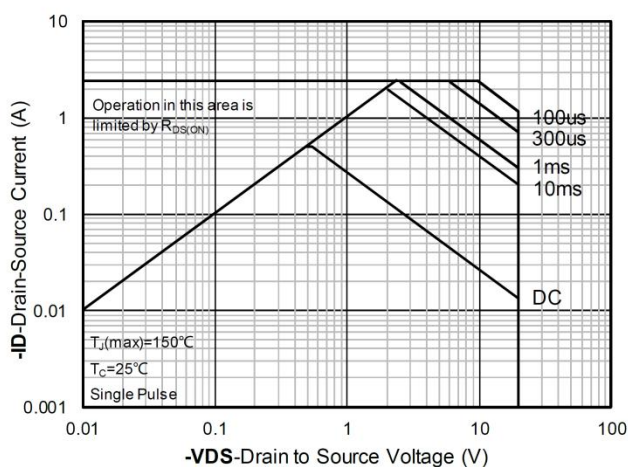

Safe Operation Area

SOT-523 Package Information

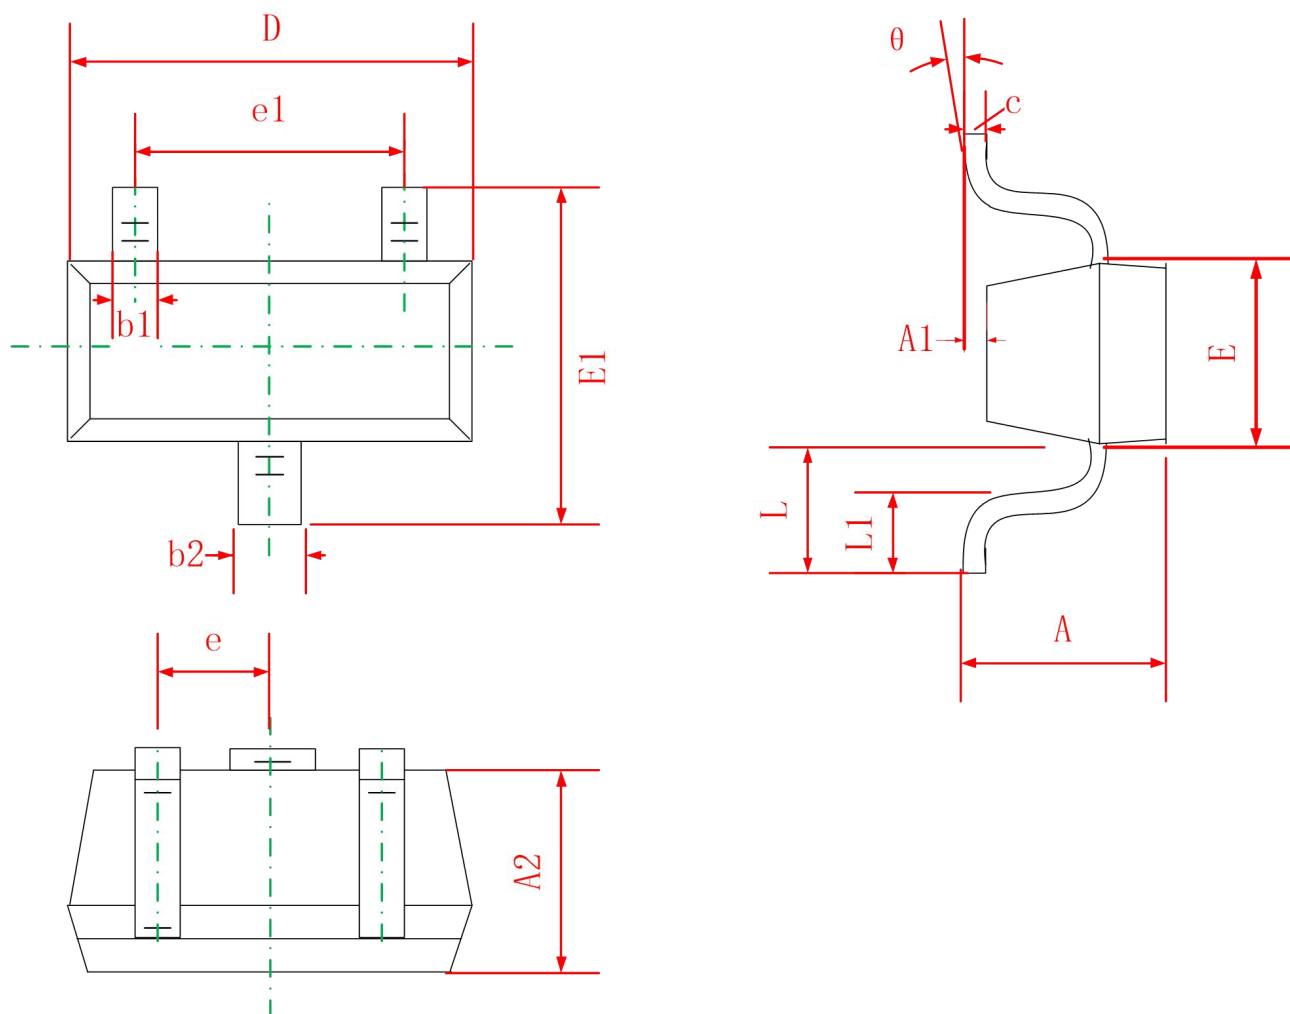

Symbol	Dimensions In Millimeters	
	Min	Max
A	0.700	0.900
A1	0.000	0.100
A2	0.700	0.800
b1	0.150	0.250
b2	0.250	0.350
C	0.100	0.200
D	1.500	1.700
E	0.700	0.900
E1	1.450	1.750
e	0.500 TYP	
e1	0.900	1.100
L	0.400 REF	
L1	0.260	0.460
θ	0°	8°