

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
20V	18mΩ@4.5V	5A
	24mΩ@2.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- High power and current handling capability
- Surface mount package

Application


- Battery Switch
- DC/DC Converter

Package




SOT-23-6L

Circuit diagram

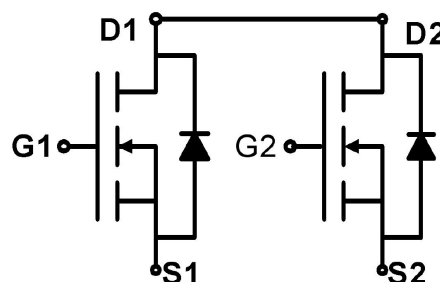

Marking

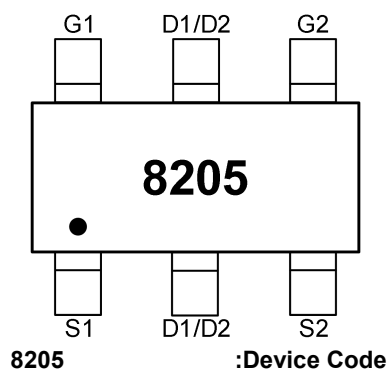

Order Information

Device	Package	Unit/Tape
SP8205DTS	SOT-23-6L	3000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	5	A
Pulse Drain Current Tested	I_{DM}	20	A
Power Dissipation	P_D	1.5	W
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	83.3	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250μA	20	-	-	V
Drain-Source Leakage Current	I _{DSS}	VDS=16V , VGS=0V	-	-	1	uA
Gate-Source Leakage Current	I _{GSS}	VGS=±12V , VDS=0V	-	-	±100	nA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250μA	0.5	0.7	1.2	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS=4.5V , ID =4.5A	-	18	27	mΩ
		VGS=2.5V , ID =3.5A	-	24	32	
Dynamic characteristics						
Input Capacitance	C _{iss}	VDS=10V , VGS=0V , f=1MHz	-	415	-	pF
Output Capacitance	C _{oss}		-	87	-	
Reverse Transfer Capacitance	C _{rss}		-	70	-	
Total Gate Charge	Q _g	VDS=10V , VGS=4.5V , ID=4A	-	6.5	-	nC
Gate-Source Charge	Q _{gs}		-	1.2	-	
Gate-Drain Charge	Q _{gd}		-	1.5	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	VDD=10V , VGS=4.5V , RG=3Ω , ID=1A	-	4.5	-	nS
Turn-On Rise Time	t _r		-	80	-	
Turn-Off Delay Time	t _{d(off)}		-	25	-	
Turn-Off Fall Time	t _f		-	23	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	V _{SD}	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V


Typical Characteristics

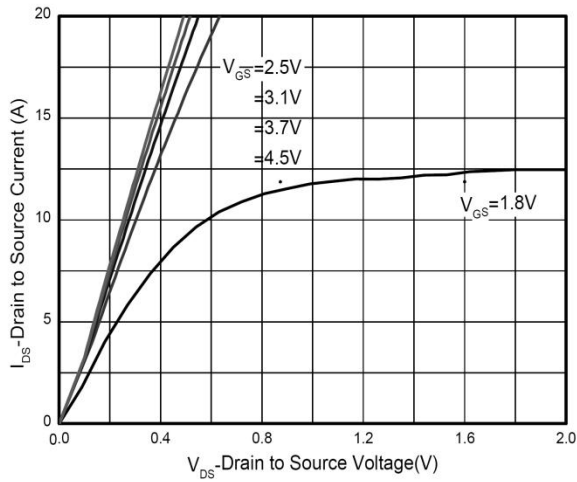


Output characteristics

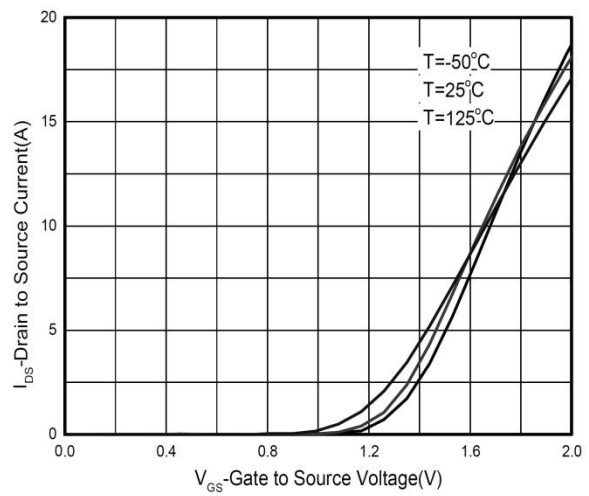


Transfer characteristics

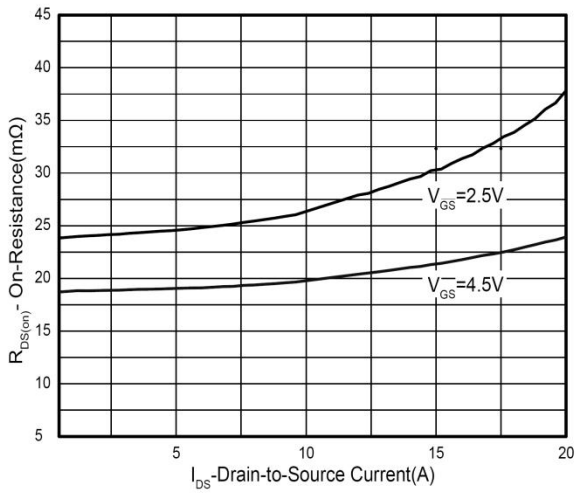


On-Resistance vs. Drain current

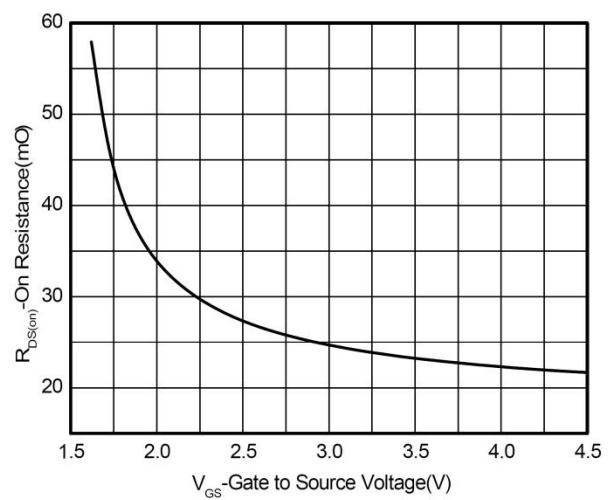





On-Resistance vs. Gate-to-Source voltage

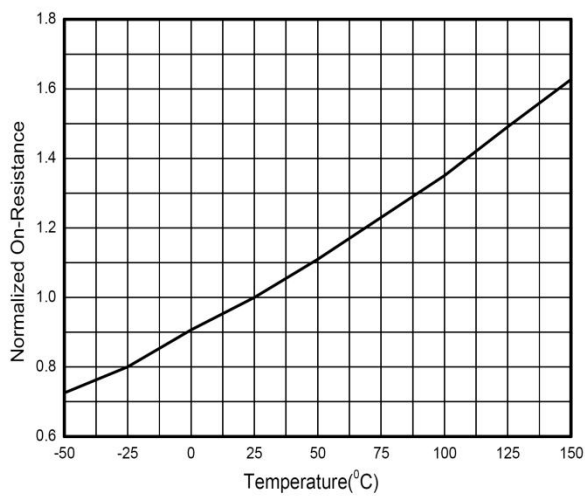

On-Resistance vs. Junction temperature

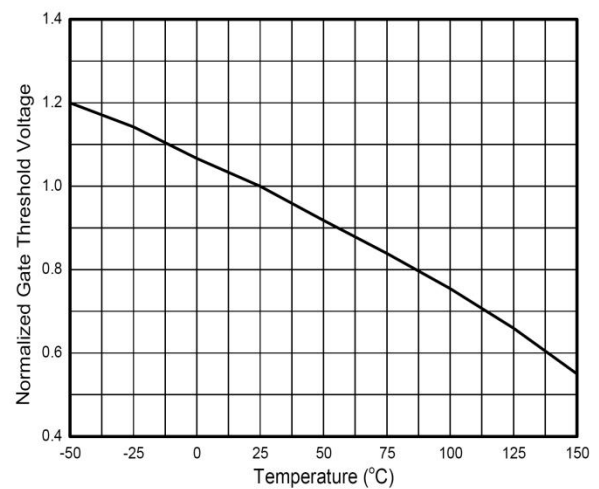


Threshold voltage vs. Temperature

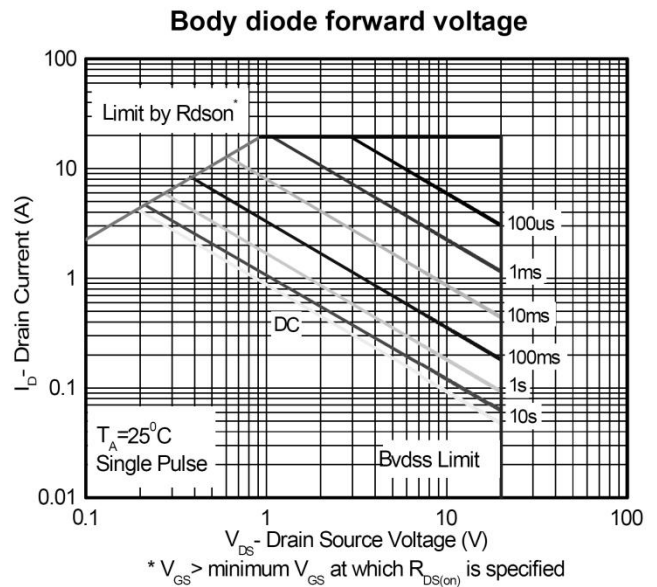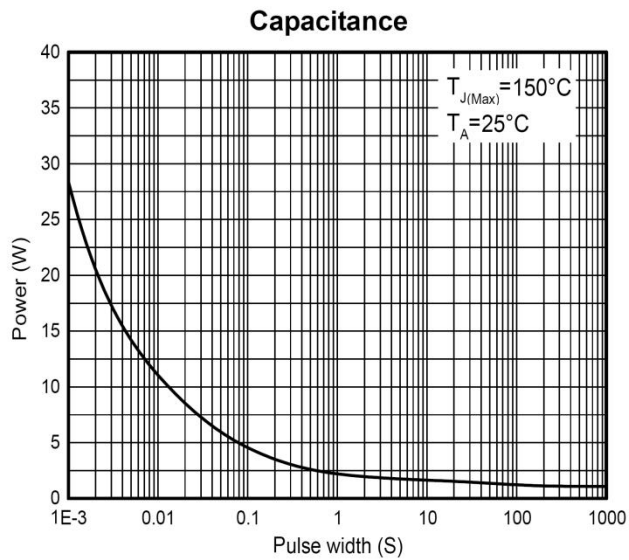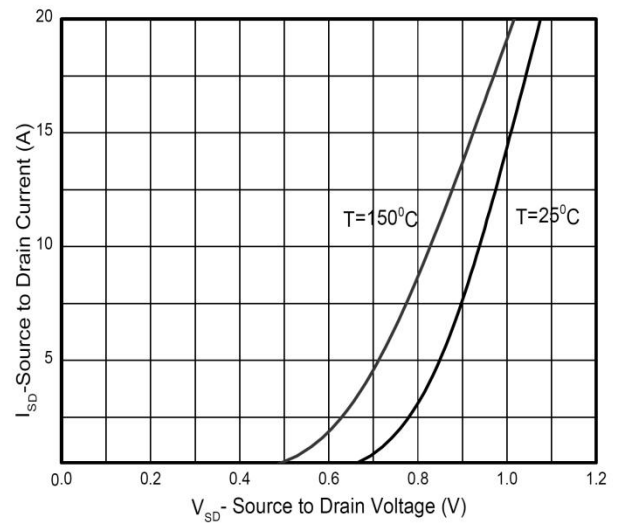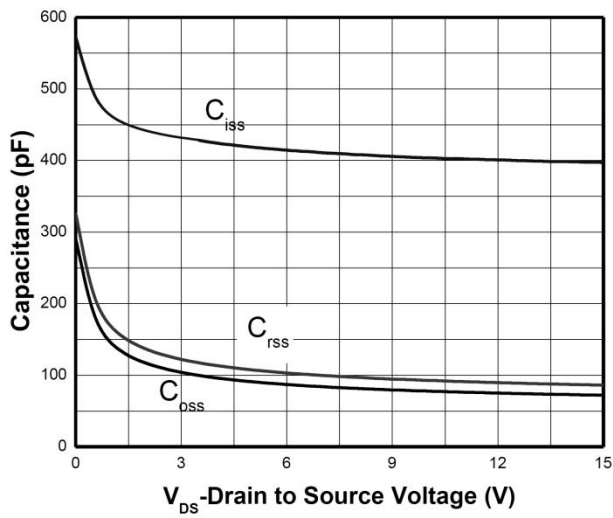


Single pulse power

Safe operating power

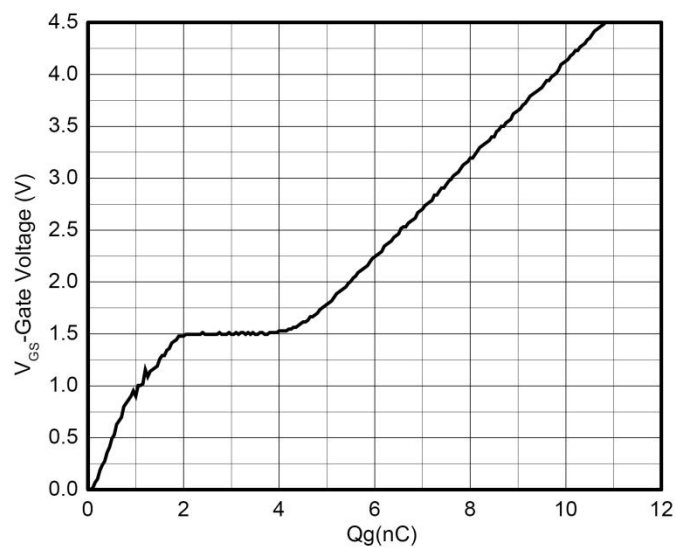

Gate charge Characteristics

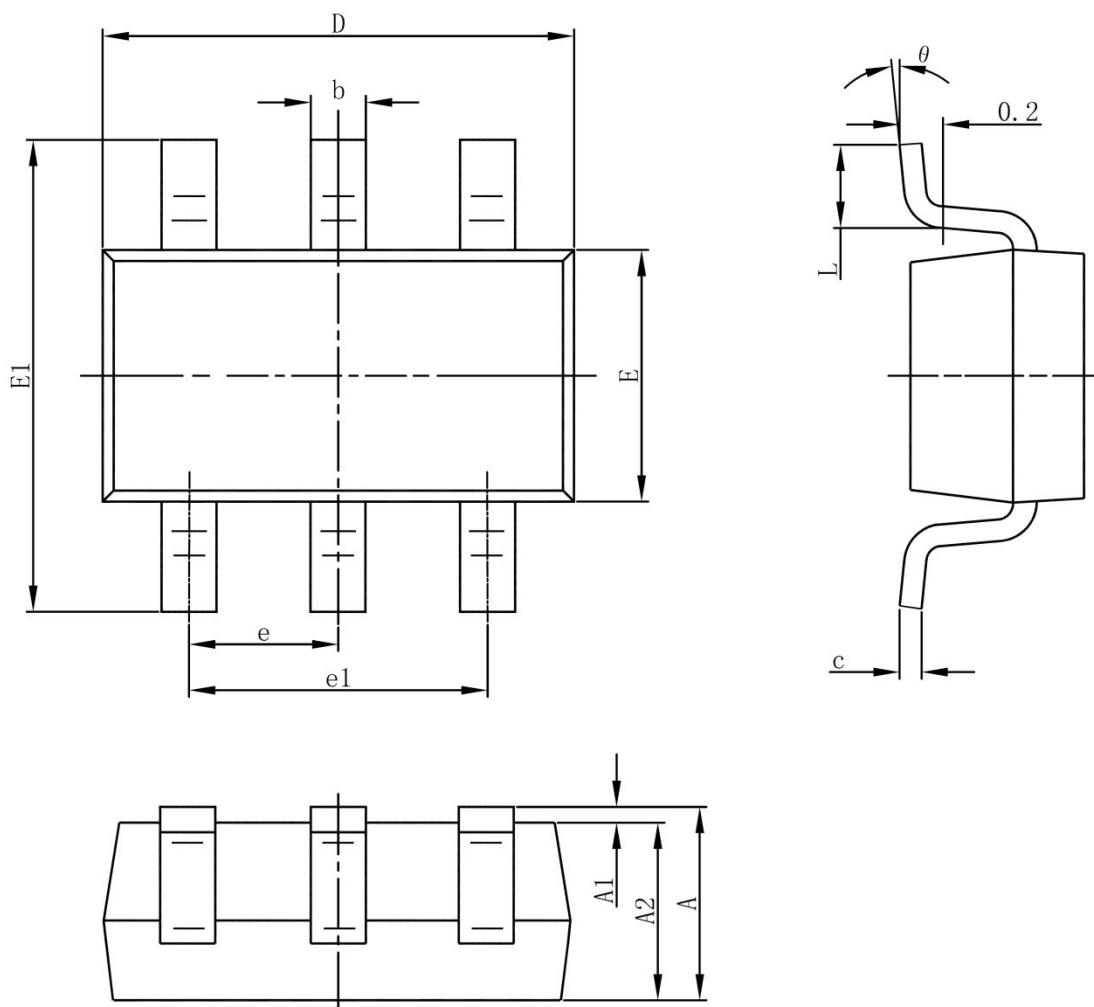SOT-23-6L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°