


Features

- ◆ Low $R_{DS(on)}$ @ $V_{GS} = -10V$
- ◆ -5V Logic Level Control
- ◆ RoHS Compliant
- ◆ Pb-Free
- ◆ Halogen Free

特征

- ◆ 低导通电阻 @ $V_{GS} = 10V$
- ◆ -5V 逻辑电平控制
- ◆ 符合 RoHS 标准
- ◆ 不含铅
- ◆ 不含卤素

V_{DS}	-30V
$I_D @ T_A = 25^\circ C$	-4.2A
$R_{DS(on)} @ V_{GS} = -10V, I_D = -4A$ Typ. ~ Max. ($T_j = 25^\circ C$)	43 ~ 55m Ω

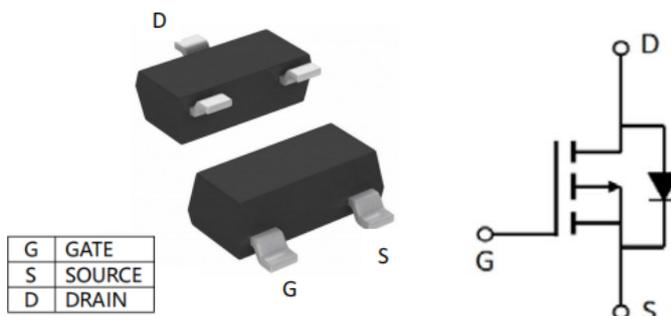
SOT-23
Application 应用

- ◆ Load Switch 负载开关
- ◆ Switching Circuits 开关电路
- ◆ High speed line driver 高速线路驱动器
- ◆ Power Management Functions 电源管理功能

Marking Content 丝印内容

Device Type 器件型号	Device Marking 器件印字
AO3407-CN	A79T

Ordering information 订购信息

Device Type 器件型号	Package 封装	Reel Size 卷盘尺寸	SPQ 标准包装量	MPQ 最小包装数量	MOQ 最小订购数量
AO3407-CN	SOT-23	7 Inch 英寸	3000/Reel 卷	45000/Box 盒	180000/Carton 箱

1、Package 封装
Table 1_ Characteristic values
表 1 特征数值

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Values 数值			Unit 单位
			Min. 最小	Typ. 典型	Max. 最大	
Storage temperature 储存温度	T_{stg}	/	-50	/	+150	$^\circ C$
Thermal resistance, Junction-Ambient 结至环境热阻	$R_{\theta JA}$	/	/	/	80	$^\circ C/W$

2、MOSFET
Table 2_ Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

表 2_ 极限参数(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Value 数值	Unit 单位
Drain-Source Voltage 漏极-源极电压	V_{DS}	/	-30	V
Gate-Source Voltage 栅极-源极电压	V_{GS}	/	± 20	V
Continuous Drain Current 持续漏极电流	I_D	$T_A = 25^\circ\text{C}$	-4.2	A
		$T_A = 70^\circ\text{C}$	-3.3	
Pulse Drain Current① 脉冲漏极电流	I_{DM}	Pulse width limited by maximum allowable junction temperature	-16.8	A
Power Dissipation 耗散功率	P_D	$T_A = 25^\circ\text{C}$	1.2	W
		$T_A = 70^\circ\text{C}$	0.9	

Table 3__ Electrical Characteristic Values(T_A=25°C,unless otherwise noted)
表 3__ 电气特性数值(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Limits 限值			Unit 单位
			Min.	Typ.	Max.	
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated) 静态电气特性						
Drain-source breakdown voltage 漏源极击穿电压	V _{(BR)DSS}	V _{GS} =0V I _D =-250μA	-30	/	/	V
Zero Gate Voltage Drain Current 零栅压漏极-源极漏电流	I _{DSS}	V _{DS} =-30V V _{GS} =0V T _A = 25°C	/	/	-1	μA
		V _{DS} =-24V V _{GS} =0V T _A = 125°C	/	/	-100	
Gate-Source Leakage Current 栅极驱动漏电流	I _{GSS}	V _{GS} =±20V V _{DS} =0V	/	/	±100	nA
Gate threshold voltage 开启电压 (阈值电压)	V _{GS(th)}	V _{DS} =V _{GS} I _D =-250μA	-1.2	-1.6	-2.5	V
Drain-Source on-state resistance 导通电阻②	R _{DS(on)}	V _{GS} =-10V I _D =-4A	/	43	55	mΩ
		V _{GS} =-4.5V I _D =-3A	/	66	80	
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated) 动态电气特性						
Input Capacitance 输入电容	C _{iss}	V _{DS} =-15V V _{GS} =0V f=1MHz	/	493	/	pF
Output Capacitance 输出电容	C _{oss}		/	65	/	
Reverse Transfer Capacitance 反向传输电容	C _{rss}		/	44	/	
Total Gate Charge 栅极总充电电量	Q _g	V _{DS} =-15V I _D =-4A V _{GS} =-10V	/	8.2	/	nC
Gate-Source Charge 栅源极总充电电量	Q _{gs}		/	0.8	/	
Gate-Drain Charge 栅漏极总充电电量	Q _{gd}		/	2.7	/	

② Pulse test: Pulse width≤300μs,duty cycle≤2%.
脉冲测试: 脉冲宽度≤300μs, 占空比≤2%。

Table 4_ Characteristic Values
表 4_ 特征数值

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Limits 限值			Unit 单位
			Min.	Typ.	Max.	
Turn-on delay time 漏源极导通延迟时间	$t_{d(on)}$	$V_{DD} = -15V$ $I_D = -1A$ $V_{GS} = -10V$ $R_G = 3.3\Omega$	/	7.2	/	ns
Rise Time 漏源极电流上升时间	t_r		/	4.8	/	
Turn-off delay time 漏源极关断延迟时间	$T_{d(off)}$		/	25	/	
Fall time 漏源极电流下降时间	t_f		/	8.5	/	
Operating junction temperature 工作结温度	T_j	/	/	/	+150	°C

3、Source-Drain Diode characteristics 源极-漏极二极管特性
Table 5_ Maximum rated values (TA= 25°C unless otherwise noted)
表 5_ 最大额定值(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Value 数值		Unit 单位
			Typ.	Max.	
Diode forward voltage 二极管正向导通电压②	V_{SD}	$T_j = 25^\circ C$ $I_{SD} = -4A$ $V_{GS} = 0V$	-0.88	-1.2	V
Source drain current (Body Diode) 源漏电流 (体二极管)	I_{SD}	/	/	-2	A

 ② Pulse test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

 脉冲测试: 脉冲宽度 $\leq 300\mu s$, 占空比 $\leq 2\%$ 。

4、Characteristics diagrams 特性图

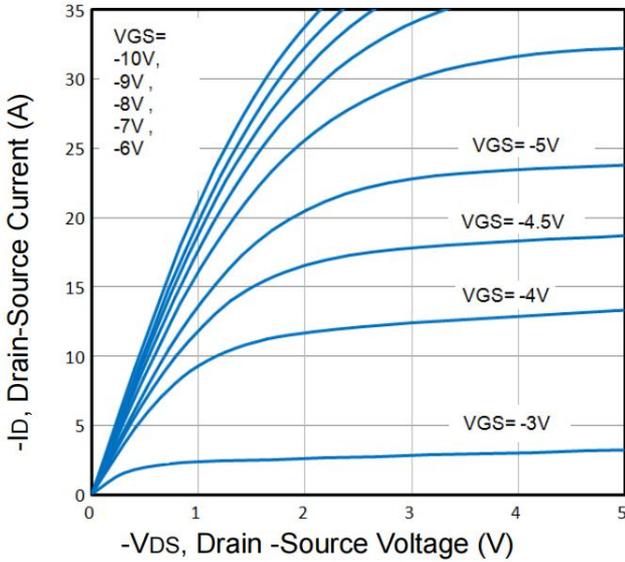


Fig1. Typical Output Characteristics

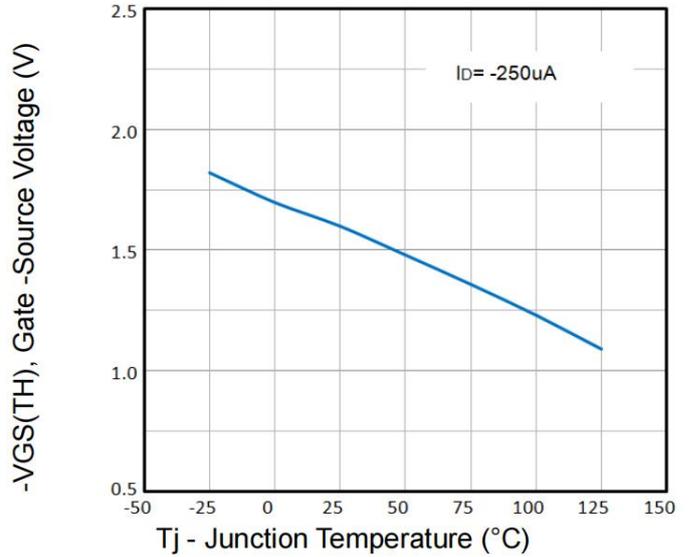


Fig2. Normalized Threshold Voltage Vs. Temperature

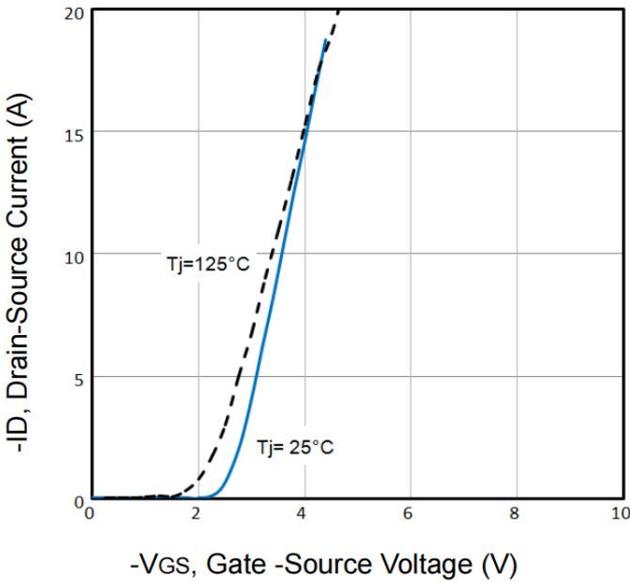


Fig3. Typical Transfer Characteristics

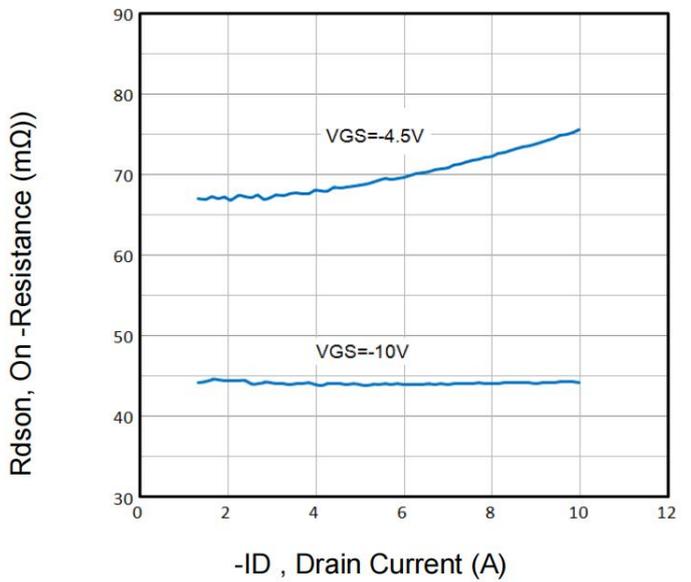


Fig4. On-Resistance vs. Drain Current and Gate

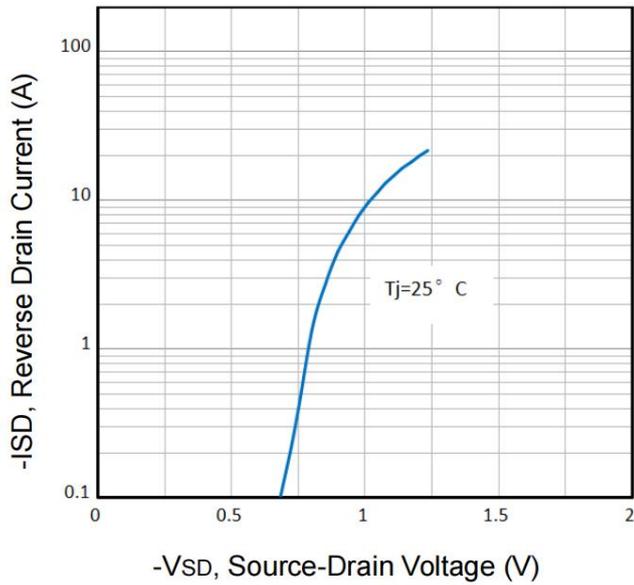


Fig5. Typical Source-Drain Diode Forward Voltage

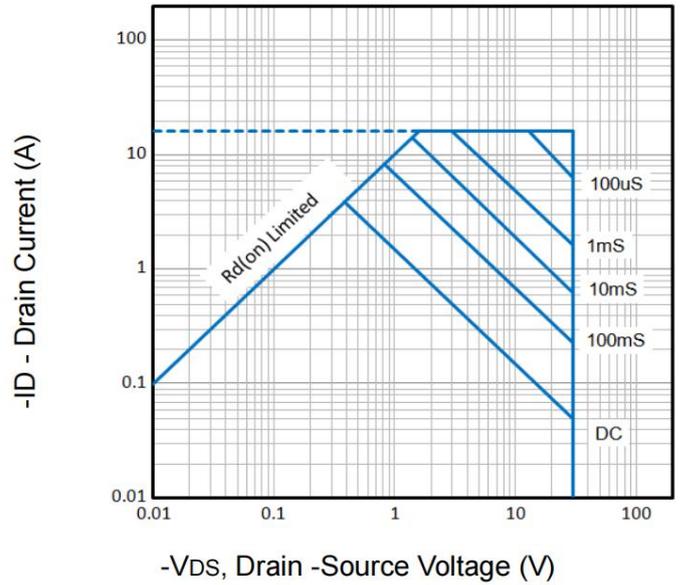


Fig6. Maximum Safe Operating Area

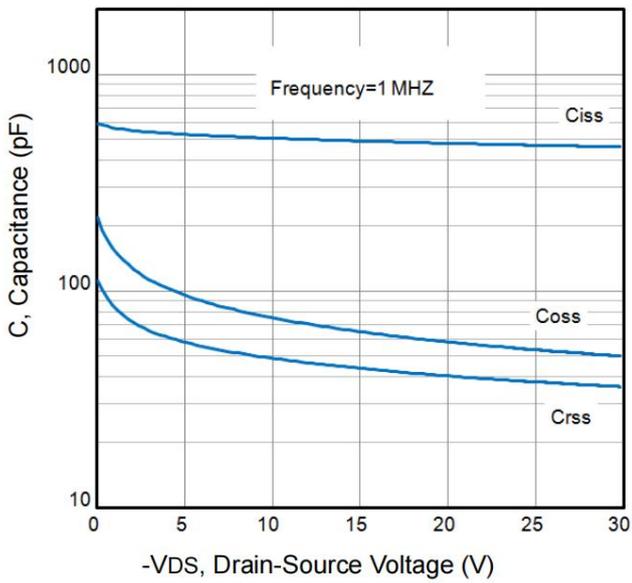


Fig7. Typical Capacitance Vs. Drain-Source Voltage

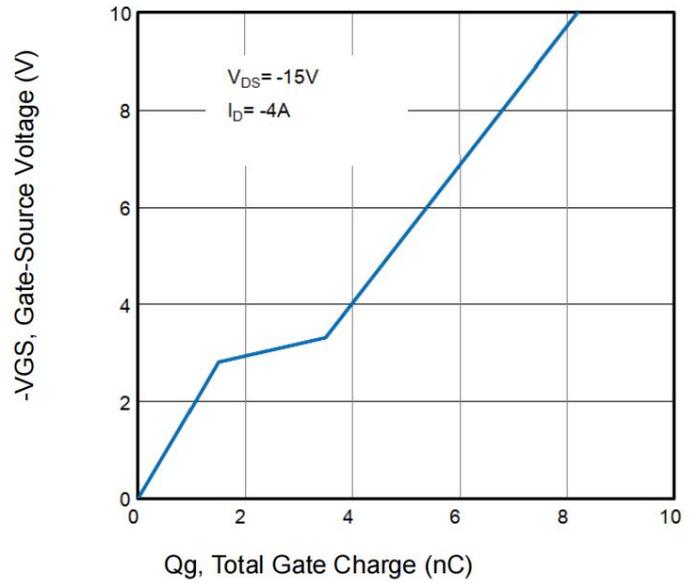


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

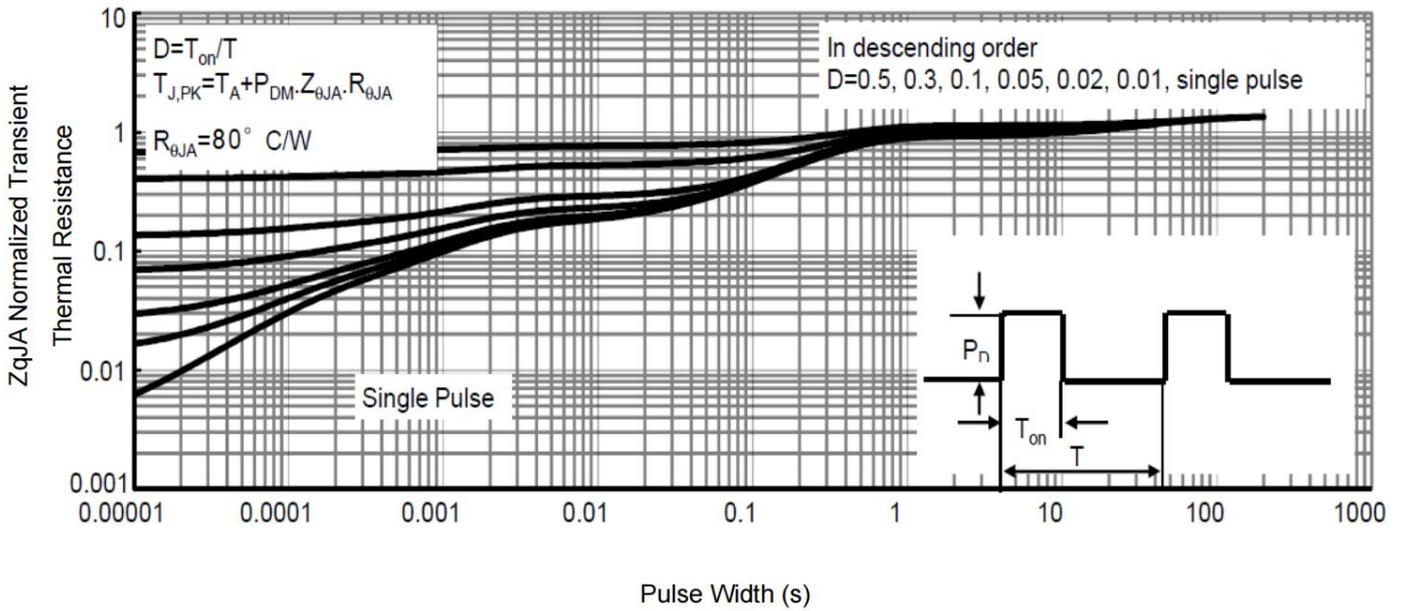


Fig9. Normalized Maximum Transient Thermal Impedance


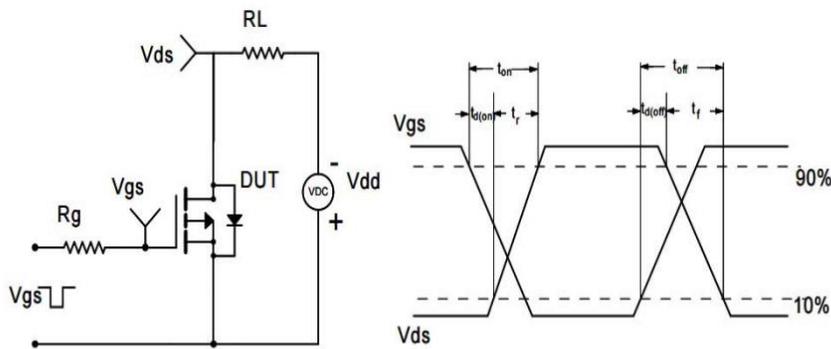


Fig10. Switching Time Test Circuit and waveforms

5、Package 封装信息

SOT-23 Package Information

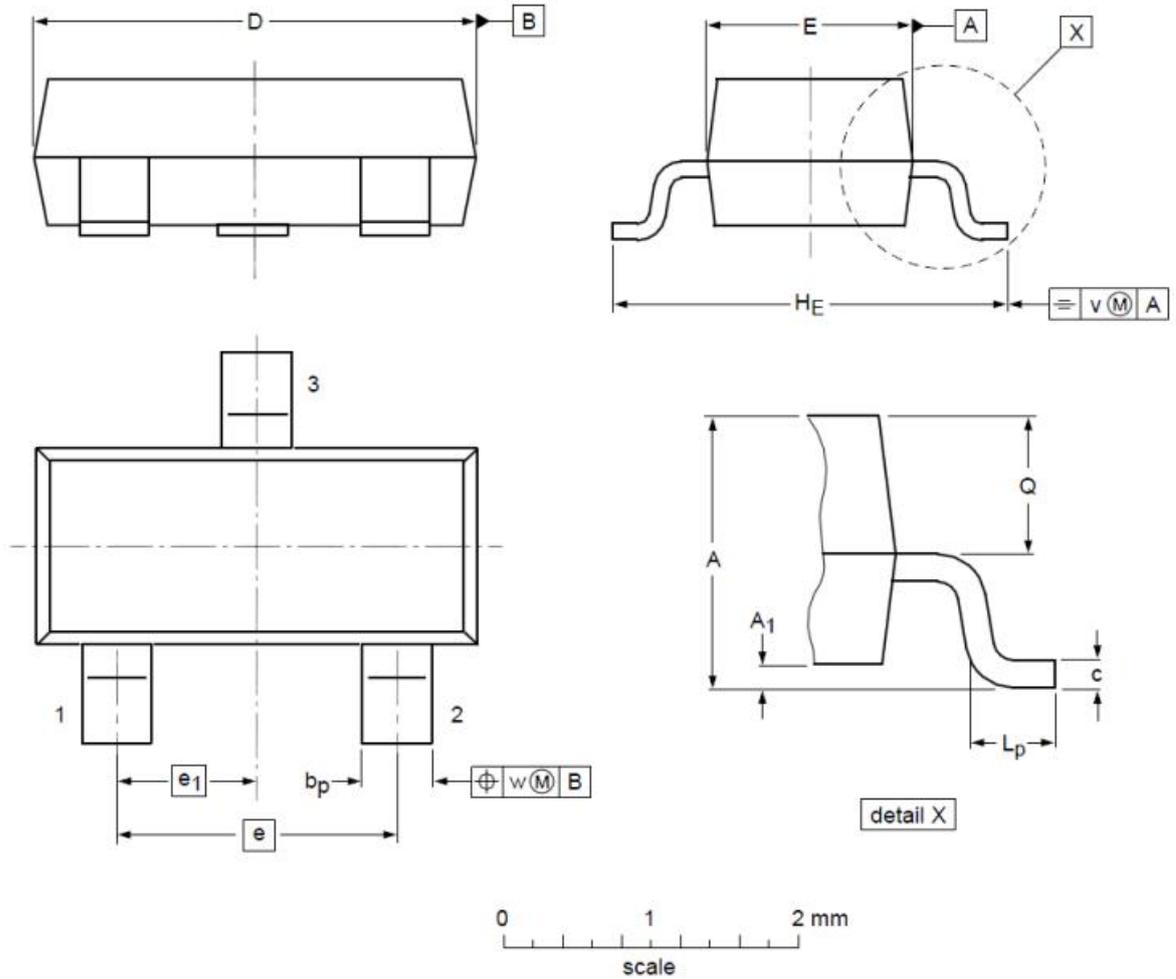

DIMENSIONS (unit : mm)

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	0.90	1.01	1.15	A ₁	0.01	0.05	0.10
b _p	0.30	0.42	0.50	c	0.08	0.13	0.15
D	2.80	2.92	3.00	E	1.20	1.33	1.40
e	--	1.90	--	e ₁	--	0.95	--
H _E	2.25	2.40	2.55	L _p	0.30	0.42	0.50
Q	0.45	0.49	0.55	v	--	0.20	--
w	--	0.10	--				

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。