

SOT-323 Plastic-Encapsulate Transistors

● Features



- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

Supply Voltage
VCC -50V
Collector Current
-0.05 Ampere


● Mechanical Data

- Case: SOT-323
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026

● Function Diagram



SOT-323



● Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-323	R1	0.006	3000	15000	150000	7"

● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Supply Voltage	V _{CC}	V	-50
Input Voltage	V _{IN}	V	-40~+10
Output Current	I _O	mA	-50
Peak Collector Current	I _{CM}	mA	-100
Power Dissipation	P _D	mW	200
Storage temperature	T _{stg}	°C	-55 ~+150
Junction temperature	T _j	°C	-55 ~+150





● Small-signal Characteristics

ITEM	SYMBOL	Condition	UNIT	Min	Typ	Max
Transition frequency	f _T	I _O = -5mA, V _O = -10V	MHz	-	250	-

● **Electrical Characteristics** (Ta=25°C Unless otherwise noted)

PARAMETER	SYMBOL	UNIT	Condition	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$I_o = -100\mu A, V_{cc} = -5V$	-0.5	-	-
	$V_{I(on)}$		$I_o = -10mA, V_o = -0.3V$	-	-	-3
Output voltage	$V_{O(on)}$		$I_o / I_i = -10mA / -0.5mA$	-	-	-0.3
Input current	I_i	mA	$V_i = -5V$	-	-	-0.88
Output current	$I_{O(off)}$	μA	$V_{cc} = -50V, V_i = 0V$	-	-	-0.5
DC Current Gain	G_i	-	$V_o = -5V, I_o = -5mA$	30	-	-
Input resistance	R_i	k Ω	-	7	10	13
Resistance ratio	R_2 / R_1	-	-	0.8	1	1.2

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

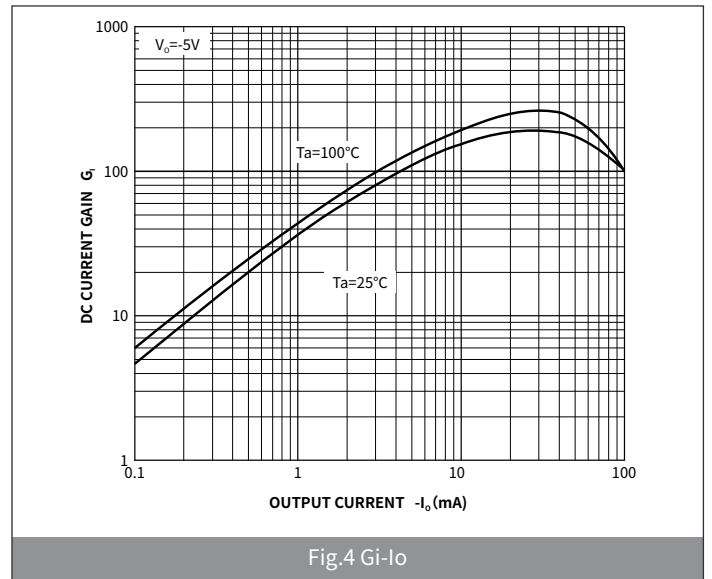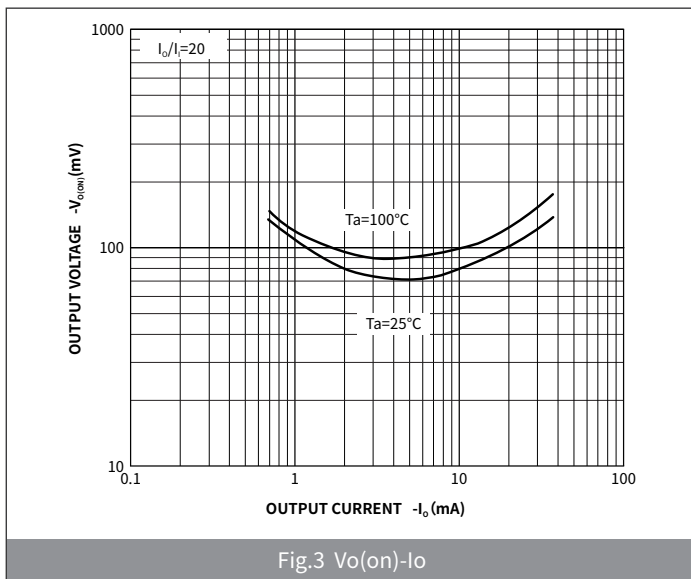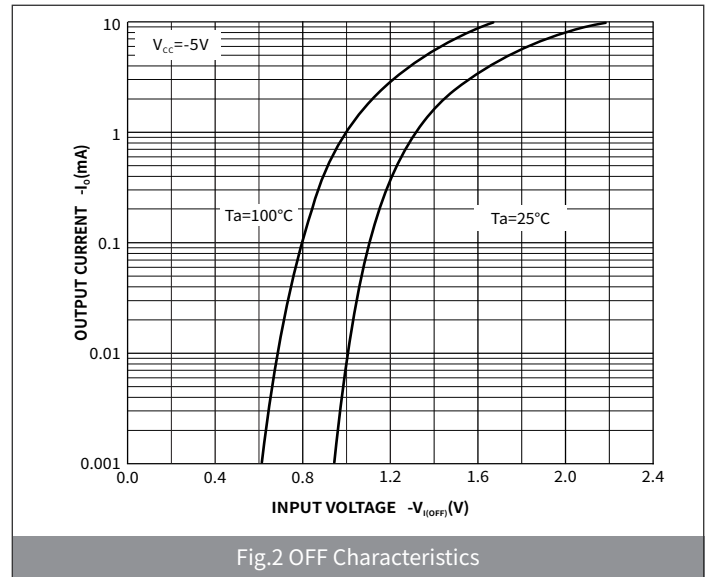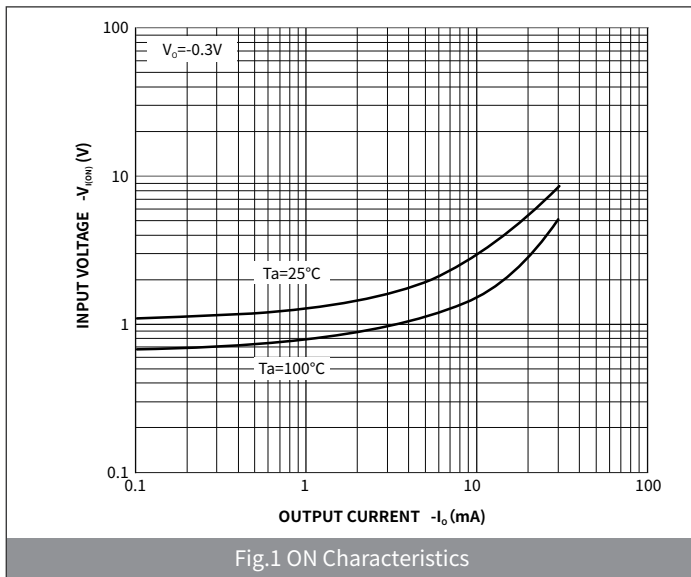

● **Package Outline Dimensions** (SOT-323)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.10	0.035	0.043
A1	0.90	1.00	0.035	0.039
B	0.15	0.40	0.006	0.016
c	0.10	0.25	0.004	0.010
D	1.80	2.20	0.071	0.087
E	1.15	1.35	0.045	0.053
E1	2.15	2.45	0.085	0.096
e	1.20	1.40	0.047	0.055
L	0.525REF		0.021 REF	
θ	-	8°	-	8°

● **Suggested Pad Layout**

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.65	0.75	0.026	0.030
K	0.85	0.95	0.033	0.037
M	1.85	1.95	0.073	0.077
N	1.25	1.35	0.049	0.053