


SOT-523 Plastic-Encapsulate MOSFETS

Features

- Low on resistance $R_{DS(ON)}$
- Low gate threshold voltage
- Low input capacitance
- ESD protected up to 2KV

SOT-523


RoHS
COMPLIANT

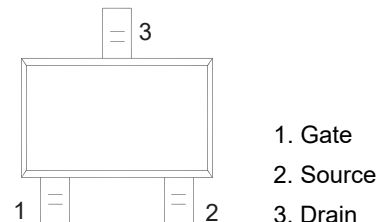

Application


- Load Switch for Portable Devices
- DC/DC Converter

Marking



K72 = Device code

Equivalent Circuit



Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current (Continuous)	I_D	300	mA
Drain Current (Pulse Width $\leq 10 \mu\text{s}$)	I_{DM}	800	mA
Total Power Dissipation	P_{tot}	350	mW
Operating and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Drain Source Breakdown Voltage at $I_D = 10\text{ }\mu\text{A}$	BV_{DSS}	60	-	V
Zero Gate Voltage Drain Current at $V_{DS} = 60\text{ V}$	I_{DSS}	-	1	μA
Gate Source Leakage Current at $V_{GS} = \pm 20\text{ V}$	I_{GSS}	-	± 10	μA
Gate Threshold Voltage at $V_{DS} = 10\text{ V}$, $I_D = 250\text{ }\mu\text{A}$	$V_{GS(th)}$	1	2.5	V
Static Drain Source On-Resistance at $V_{GS} = 10\text{ V}$, $I_D = 500\text{ mA}$ at $V_{GS} = 4.5\text{ V}$, $I_D = 200\text{ mA}$	$R_{DS(ON)}$	- -	3 4	Ω
Forward Transconductance at $V_{DS} = 10\text{ V}$, $I_D = 200\text{ mA}$	g_{fs}	80	-	mS
Input Capacitance at $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{iss}	-	50	pF
Output Capacitance at $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{oss}	-	25	pF
Reverse Transfer Capacitance at $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{rss}	-	5	pF

Typical Characteristics

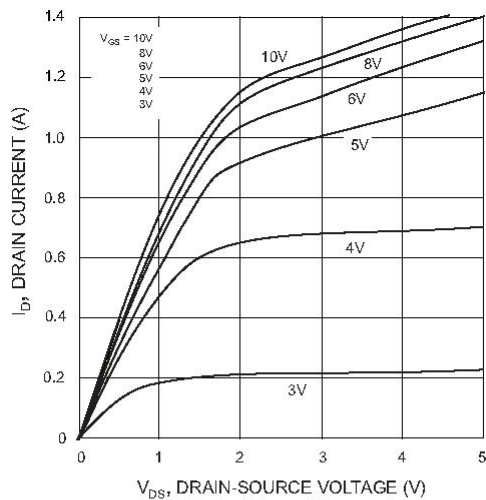


Fig. 1 Typical Output Characteristics

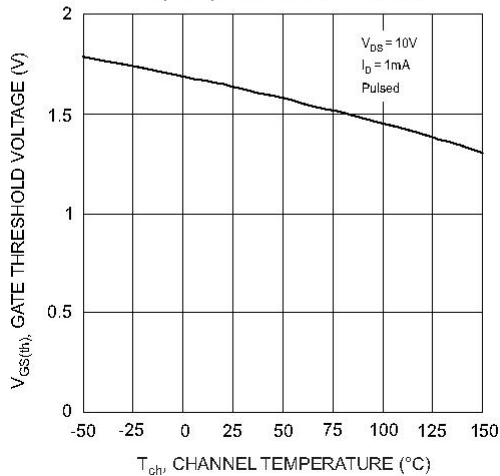


Fig. 3 Gate Threshold Voltage vs. Channel Temperature

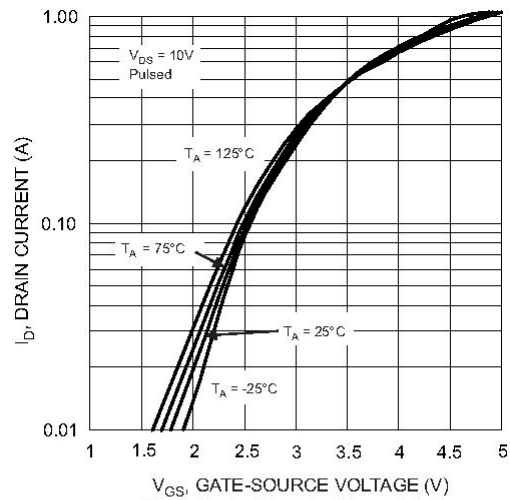


Fig. 2 Typical Transfer Characteristics

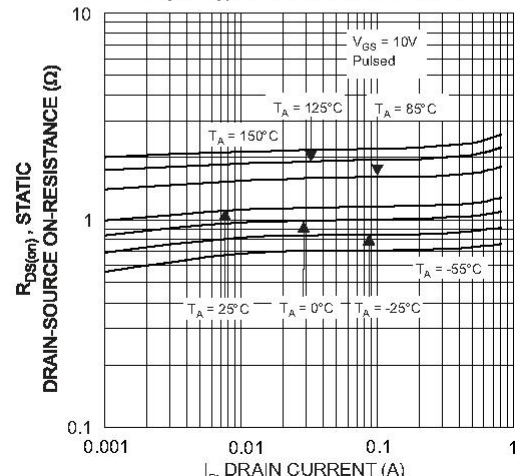


Fig. 4 Static Drain-Source On-Resistance vs. Drain Current

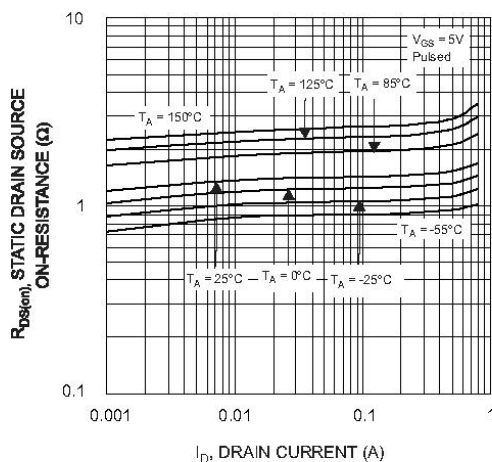


Fig. 5 Static Drain-Source On-Resistance vs. Drain Current




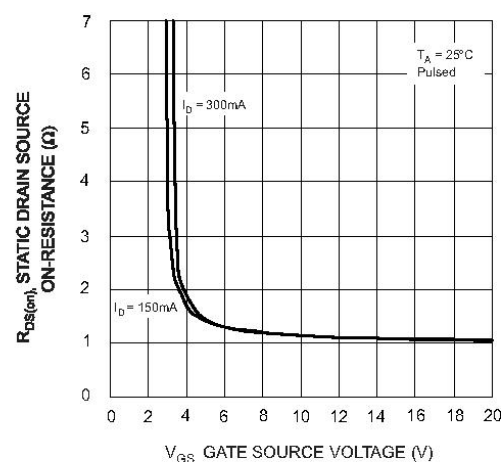



Fig. 6 Static Drain-Source On-Resistance vs. Gate-Source Voltage

SOT-523 Package Outline Dimensions

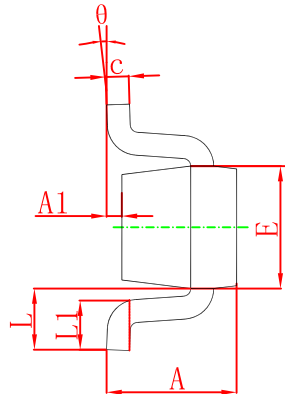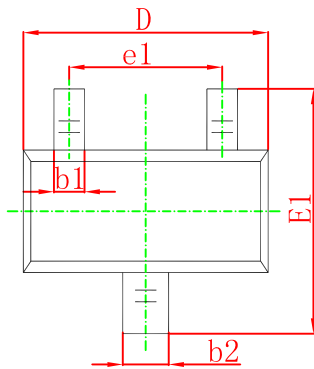

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.600	0.950	0.024	0.037
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.150	0.350	0.006	0.014
c	0.100	0.250	0.004	0.010
D	1.400	1.800	0.055	0.071
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.150	0.450	0.006	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout

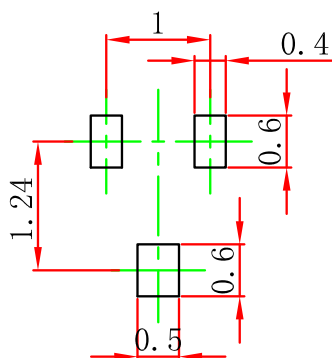

Note:

1. Controlling dimension: in/millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.